



Real 4K supporting all optical DisplayPort 1.2 Extender, DPFX-200-TR

Description

OPTICIS optical DisplayPort extender, **DPFX-200-TR** is designed compact enough to be fitted into various installation environments with two (2) LC fibers connection.

The transmitter and receiver set, DPFX-200-TR enables to transmit 4K(4096x2160) at 60Hz signal up to 200m (656feet) over two (2) LC multi-mode fibers, avoiding any tricks like scaling or data compression for lessening a burden of data transmission.

Between the transmitter and the receiver, pure fiber connection by two (2) LC fibers connector gives clean, secure and easy installation with no electrical hazard and a perfect electrical isolation. The DPFX-200-TR can be operated by USB power without external DC power adapter by plugging the supplied USB to DC plug cables to each module.

Specification

- Supports **4K** and **DisplayPort 1.2** standards
- Extends **4K (4096x2160)** at 60Hz
- Transmits DP data up to **200m (656feet)** over two (2) LC multi-mode fibers (50/125um).
- Offers total data rate **21.6Gbps** (5.4Gbps per lane)
- Supports **Dual-mode DP** (DP++)
- Supports **Auxiliary I²C** channel over fiber
- Supports **Multi-Stream transport**
- Compact design allows direct connect to the DP display.
- Plug & Play
- Auto power switching
- Data security with negligible EMI emission.
- Certifies FCC and CE standards for EMI/RFI emission

Applications

- Medical imaging
- Military
- Control room
- Simulator

Real 4K supporting all optical DisplayPort 1.2 Extender, DPFX-200-TR

Technical Features



Resolution	Up to 4K(4096x2160) at 60Hz
Data rate	5.4Gbps (per lane)
Maximum distance	200m (656feet) with (50/125um) fiber
Fiber	LC terminated 2 core multi-mode fibers
AUX CH	Direct AUX CH
Power supplying	TX / RX: External 5V/1A DC power or USB cable
LED Indicators	TX: Power, Signal transmission RX: Power, Signal detection
Operating temperature	0 ~ 50℃
Operating Humid.	0 to 85% RH, non-condensing

※ 0.2m DisplayPort copper cable is strongly recommended to use on TX(Display Source) side only


※ With using DPAX, Opticis DisplayPort Data Recovery Repeater, DisplayPort signal transmission length has improved up to 300m under certain environment.

Dimension

72 x 26 x 15mm (LWH)



Connection Diagram

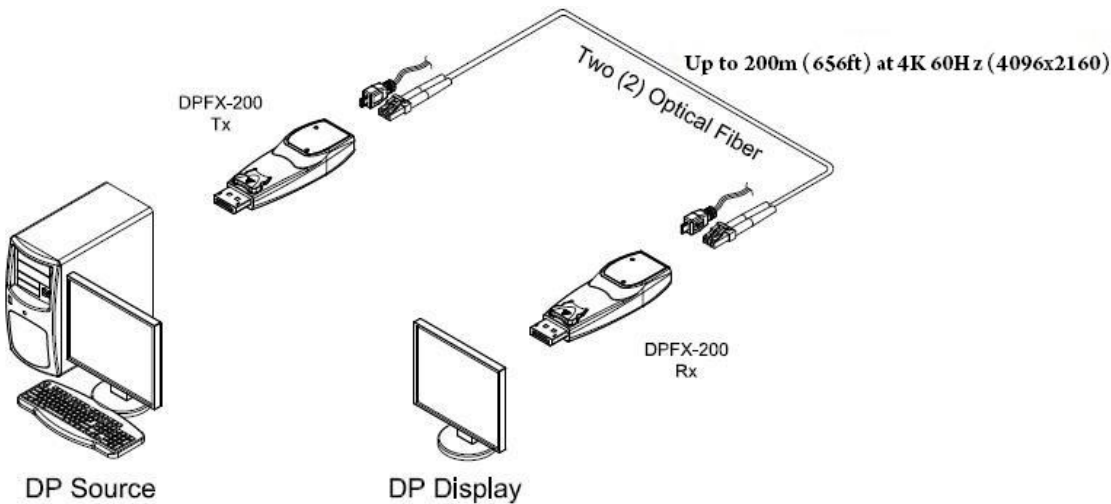

Opticis Co., Ltd.
 3F, 305, Sanseong-daero Sujeong-gu
 Seongnam-si, Gyeonggi-do, 13354 South Korea
 Tel: +82 (31) 719-8033
 Fax: +82 (31) 719-8032

tosales@opticis.com



All contents are subject to be changed without prior notice.